

# PSE


## LED Signal Light



LED

IP55 with SZ-210

Ø82




Optional Rubber Gasket SZ-210

## New LED flashing beacon! Can outlast a conventional Xenon lamp and is available in four LED Colors.

### FEATURES


- Has maintenance-free LED's that consume nearly half the power incandescent bulb models do.
- The PSE is rated for IP55 with the optional rubber gasket SZ-210 (IP23 without SZ-210).
- Has the CE mark and conforms to the requirements for the EC directive.
- Three flashing patterns of 110 fpm (±10%).

### Dimensions (Unit: mm)

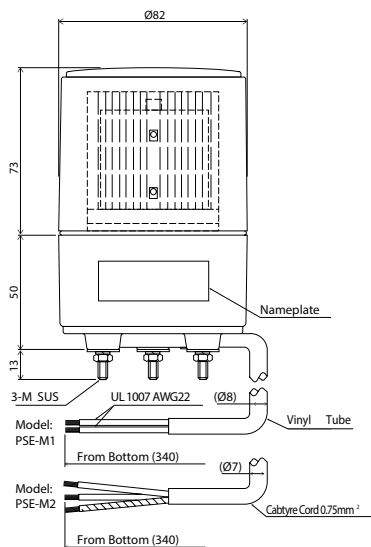


### Wiring

#### M1 Type

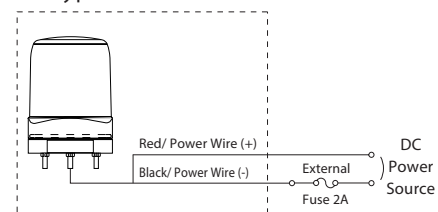

#### M2 Type

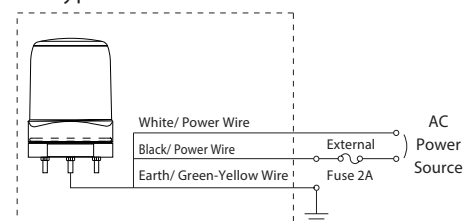

### Specifications

Model	PSE-M1	PSE-M2
Rated Voltage	DC 12V - 24V	AC 100V-240V
Power Consumption	3.0W	3.2W
Maximum Operating Ambient Temperature	60°C	
Protection Rating	IP23	
Mounting Location	Indoor or Outdoor Use	
Flash Rate	110 ±10rpm (Triple-flash)	
Mass	0.30kg	0.35kg

### How to Order

