


AIMB-228

**AMD V-series/R-series mini-ITX with
4 DP, 6 USB, 6COM, 12-24V DC-In**

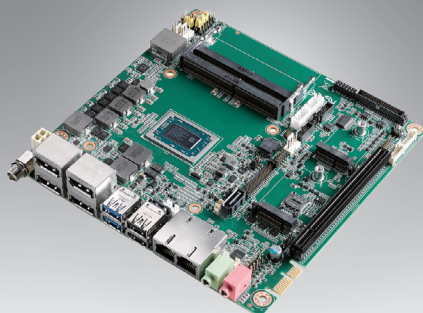

WISE-PaaS/RMM **CE FCC**

Specifications

Processor System	SOC (14nm)	V1807B	V1605B	V1202B	R1606G	R1505G	
	Max. Speed	3.8GHz (Quad Core 54W)	3.6GHz (Quad Core 25W)	3.2GHz (Dual Core 25W)	3.5GHz (3 Core 25W)	3.3GHz (3 Core 25W)	
	L2 Cache	2Mb	2Mb	2Mb	1Mb	1Mb	
	BIOS	AMI 128Mbit SPI					
Expansion Slot	M.2	1 B-Key, 1 E-Key (V1000 series only)					
	PCIe	1 PCIe x8 (R1000 Series only support x4 signal), 1 PCIe x1 (V1000 Series only)					
Memory	Technology	Dual Channel DDR4 2400 / 2666 / 3200MHz SDRAM					
	Max. Capacity	32 GB/16 GB per SO-DIMM					
	Socket	2 x 260-pin DDR4 SO-SIMM with ECC Support					
Graphics	Controller	AMD Integrated Vega GCN					
	LVDS	1, supports dual channel 48-bit up to 1920 x 1200 (Optional)					
	Display Port 1.3	4, Supports DP++, resolution up to 4096 x 2160 @ 60Hz(V1000 Series) 3, Supports DP++, resolution up to 4096 x 2160 @ 60Hz(R1000 Series)					
	Multi Display	V1000: DP/LVDS+DP+DP+DP R1000:DP/LVDS+DP+DP					
Ethernet	Interface	10/100/1000 Mbps					
	Controller	GbE LAN1: Realtek 8111G GbE LAN2: Realtek 8111G					
	Connector	RJ-45 x 2					
SATA	Max Data Transfer Rate	600 MB/s					
	Channel	2, SATA 2 colay M.2 B-Key; SATA 1 support SATA-DOM device					
Rear I/O	DP1.3 (Default)	4(V1000 Series)/3(R1000 Series)					
	Ethernet	2					
	USB	2 x USB 2.0/2 x USB 3.1 Gen2					
	Audio	2 (Line out + Mic/Line in)					
	DC jack	1 (2.5 mm)					
Internal Connector	LVDS & Inverter (Optional)	1/1					
	USB	2 x USB2.0					
	Serial	6, COM1: support RS-232 with 5V/12V/Ring COM2: support RS-232/422/485 supports 9 bit data/auto flow(select by Jumper) COM3: Colay Cctalk(5/12V; Jumper select) ; singnal mix with RS232 COM4: support 5V/12V selection(by jumper); Colay TTL (5V, TX, RX only) ; singnal mix with RS232 COM5: support RS-232/422/485 supports 9 bit data/auto flow(select by Jumper) COM6: RS-232					
		SATA	2				
		SATA PWR Connector	2				
		PS/2 KB & MS	1				
		Intrusion Protection	1				
		GPIO	16 bit				
	Watchdog Timer	Output	System reset				
Interval		Programmable 1 ~ 255 sec/min					
Power	Power Type	Wide voltage 12~24V DC input; 1 x External DC jack; 1 x Internal 4-pin (2x2) power connector; Supports AT/ATX mode					
	Typical Power Consumption	TBD					
Environment		Operating		Non-Operating			
	Temperature	0 ~ 60° C (32 ~ 140° F)		-40 ~ 85° C (-40 ~ 185° F)			
Physical Characteristics	Dimensions	170 mm x 170 mm (6.69" x 6.69")					

Features

- Support AMD V1000/R1000 processor
- Two 260-pin SO-DIMM up to 32GB DDR4 2400/2666/3200 SDRAM
- Support multi display, Max up to 4 displays
- Supports 1 PCIe x8, 1x PCIe1(Golden finger) and 2 M.2 expansion slots
- 6 COM, 4 USB 2.0, 2 USB 3.1 Gen2
- Supports WISE-PaaS/RMM and Embedded Software APIs
- Support 12-24V wide voltage DC-In


Software APIs:



Utilities:



Block Diagram

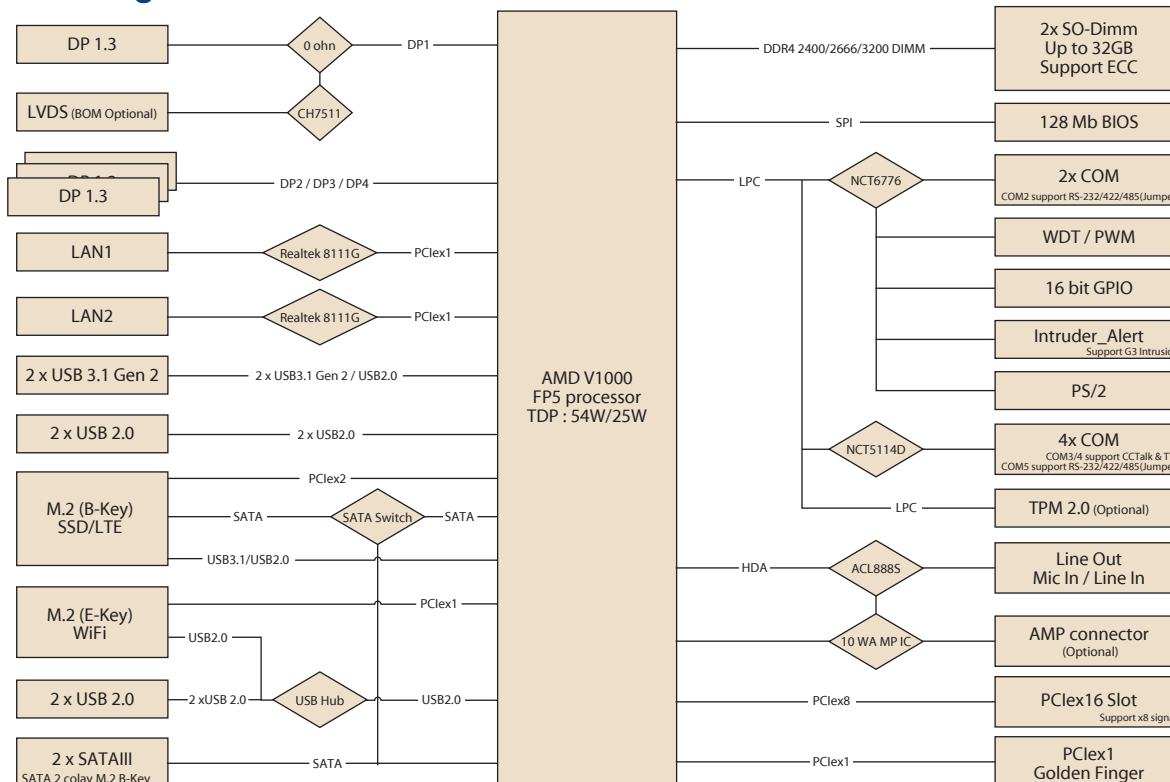

Ordering Information

Part Number	CPU	Display	TPM	LVDS	PCIe Slot	USB 3.1/2.0	GbE	SATA	COM	Thermal Solution
AIMB-228VG2-00A1E	V1807B	DP/LVDS, DP, DP, DP	(1)	(1)	x8	2/4	2	2	6	Active
AIMB-228VG2-02A1E	V1605B	DP/LVDS, DP, DP, DP	(1)	(1)	x8	2/4	2	2	6	Active
AIMB-228VG2-03A1E	V1202B	DP/LVDS, DP, DP, DP	(1)	(1)	x8	2/4	2	2	6	Active
AIMB-228RG2-00A1E	R1606G	DP/LVDS, DP, DP	(1)	(1)	x4	2/4	2	2	6	Active
AIMB-228RG2-01A1E	R1505G	DP/LVDS, DP, DP	(1)	(1)	x4	2/4	2	2	6	Active

*() BOM options available on MP version.

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	1
1700018785	SATA power cable (1 port, 25cm)	1
1700022363-01	1-to-1 serial port cable 17CM	2
1960091400T001	I/O port bracket	1
2046022800	Startup manual	1

I/O View



Optional Chassis

Part Number	Description
AIMB-B2000-00PE	AIMB-B2000 chassis 2 fan w/o PSU for PWR module

Optional Accessories

Part Number	Description
1700029538-01	F Cable D-SUB 9P(M)*4/IDE#2 40P-1.27 35CM

Embedded OS

Part Number	Description
TBD	