32″ FHD Curved touch Monitor (J-shaped with lamp)



The 32”FHD Curved touch Monitor adopts the industrial-grade full-view FHD LCD panel, and the curvature R1500 golden ratio is more suitable for the visual sense of human eyes, with accurate capacitive touch control effect and advanced image technology. To bring users a smooth touch experience and visual enjoyment, the product has passed the 3C and multiple safety certifications, and is an ideal touch and display solution. And it is widely used in self-service equipment, gambling industry, business, industry and other fields.

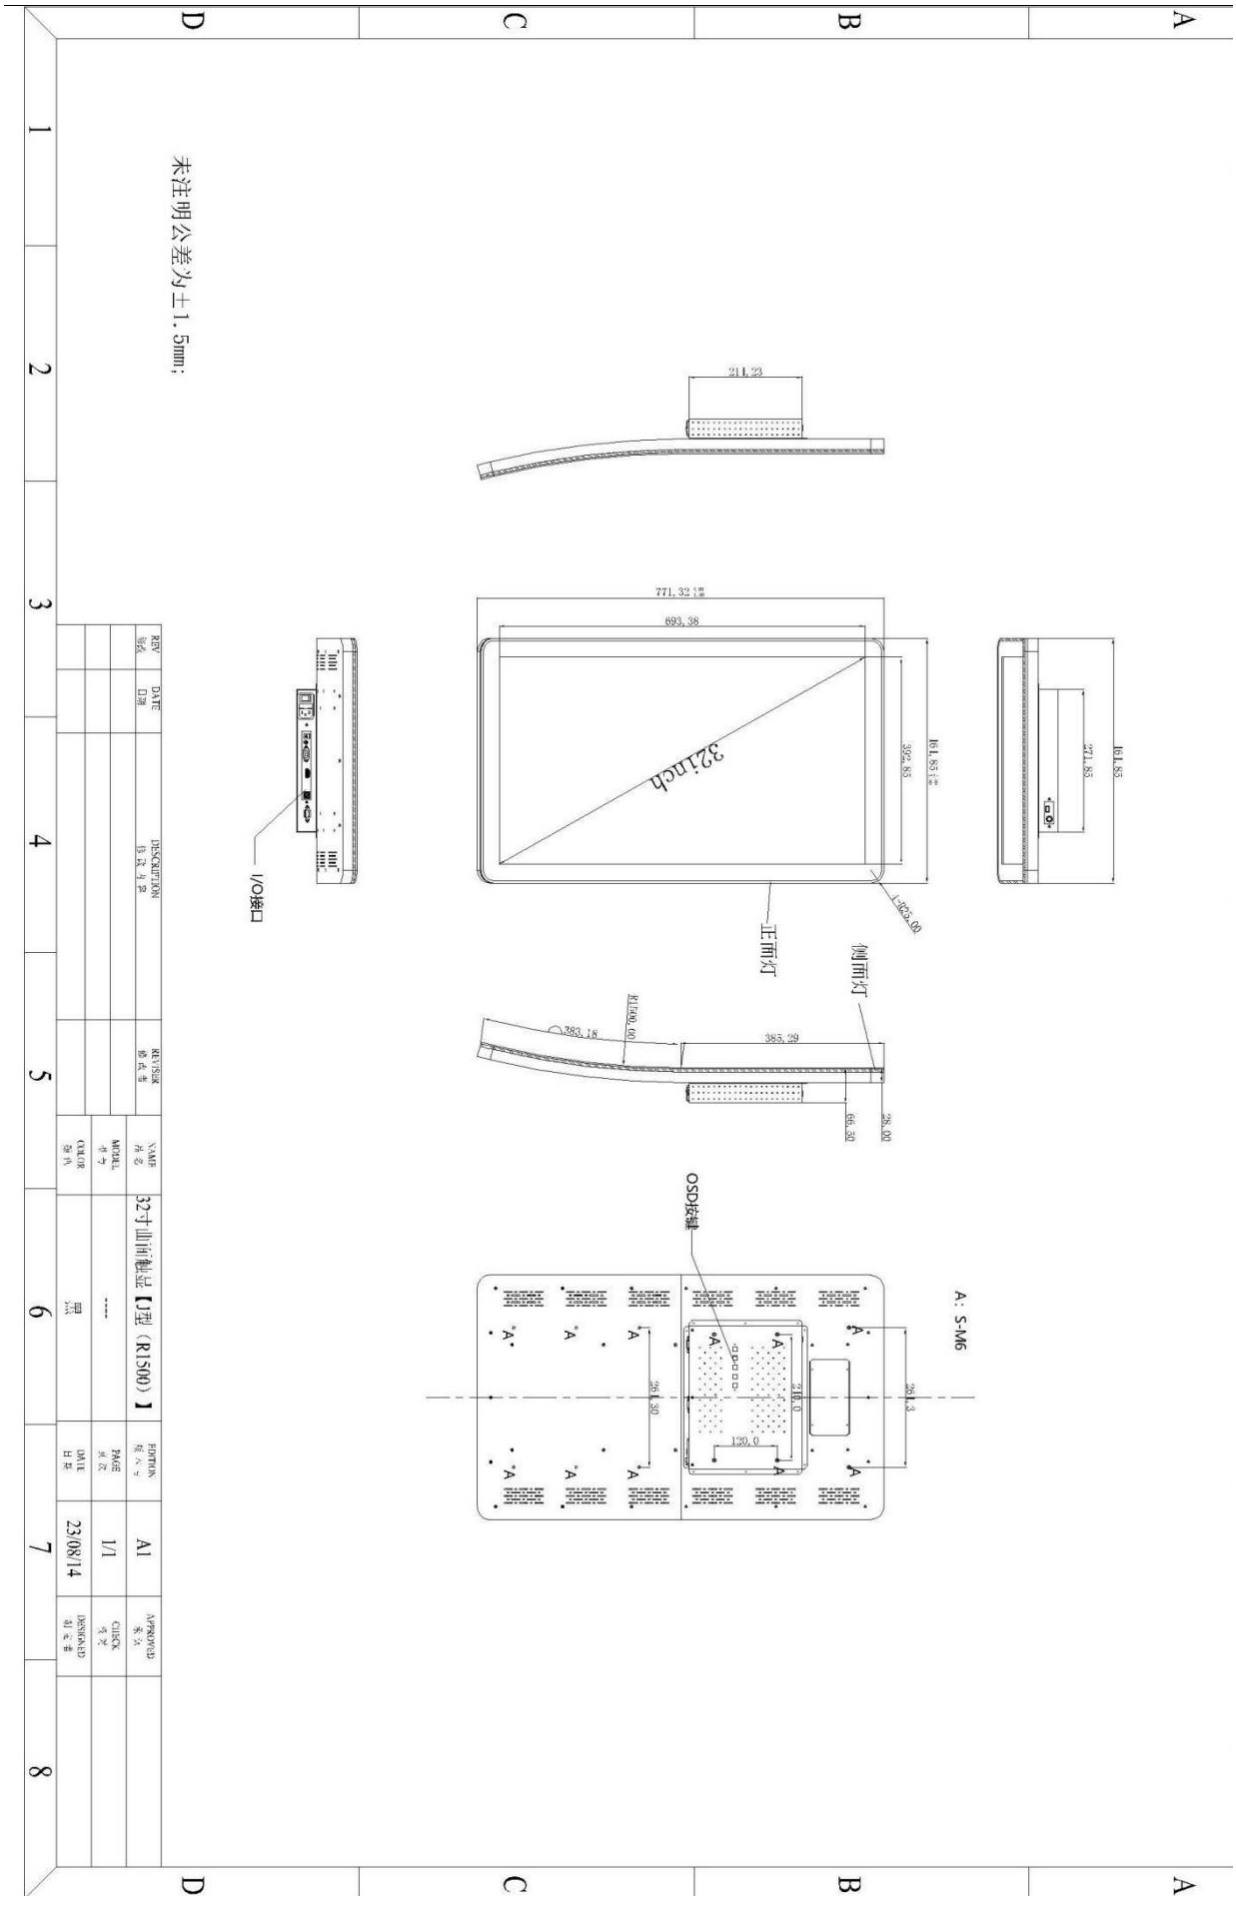
Product features:

- Innovative industrial-grade design
- FHD HD resolution
- The R1500 is curved comfort experienc
- Multi-touch capacitive control technolog
- Standard VESA, installation method
- High-end aluminum alloy frame
- HDMI, VGA interface



Model	CTM6533
LCD screen parameters	
display technique	Active matrix TFT-LCD with LED backlight
aspect ratio	16:9
Physical shape	Curved Screen, R1800
Display area	698.4×392.85mm
resolution ratio	1920×1080（FHD）
response time	8ms
Color quantity	16.7M , 72% NTSC
luminance	300cd/m²
contrast ratio	3000:1
Visual Angle	89/89/89/89 (Typ.)(CR≥10)
Touch screen parameters	
Touch way	capacitance
Touch point number	10 Points (multipoint, single point optional)
surface preparation	Hot-bending process (physical)
TP thickness	2.55mm(±0.3mm)
light transmission	≥85%
response time	10ms
communication mode	USB
Tractor parameter	
Product color	Black (white is optional)
curvature	R1500
key (OSD)	Location (side): Power, automatic, up, down, menu
SL	Chinese (optional in other languages)
Audio interface	Audio In/Earphone Out
I/O joggle	HDMI、VGA 、USB
suona	apolegamy
LED ambient lighting	apolegamy
The LED atmosphere light will display	Front / side / back side
LED controller	Controlled and uncontrollable selection

life length	50,000 Hours
range of application	The altitude is 2,000 m
power input	AC 220V～50/60Hz 0.5A
rated dissipation	78W
product size	771.32mm × 464.9mm× 66.5mm
packing measurement	847mm × 557mm× 182 mm
Net quantity	16kg
term of service	One year (1 year, 2 years, 3 years are optional)
temperature range	Operating temperature: 0℃ -50℃, storage temperature: -20℃ -60℃
Humidity range (no condensation)	Working humidity: 20% -80%, storage humidity: 10% -90%
support system	Win dows7; Android 4.4; Linux 4.4
litterae credentiales	China Compulsory Product Certification (CCC); (CE, FCC optional)
Attachment (optional)	
power line	L=1.8M
USB line	L=1.8M
HDMI line	L=1.8M
VGA line	L=1.8M


未注明公差为±1.5mm;
211.23
771.32
693.38
392.85
32inch
161.85
271.85
I/O接口
正面灯
侧面灯
R1500.00
383.18
385.29
66.30
28.00
OSD按键
A: S-M6
261.30
218.0
120.0
32寸曲面触显【J型（R1500）】
A1
1/1
23/08/14

Precautions	
During assembly and use, please pay attention to the following (and not limited to).	
1.	Make sure the socket you are using is well grounded, and connect to the power supply away from high-power equipment
2.	Keep the power supply stable, and do a good job of grounding protection to avoid lightning strikes
3.	Do not squeeze the touch area on the whole machine shell or cabinet shell
4.	Non-professionals are prohibited from touching the internal circuit of the whole machine to avoid electric shock or damage to the circuit
5.	Avoid using or storing in strong magnetism, high temperature, high humidity, high acid/alkali/salt environment
6.	Keep away from flammable materials, gas and dust
7.	Keep the whole machine in a ventilated environment and prevent the display area from being directly illuminated by sunlight
8.	Avoid opening the screen in an all-white screen state, and avoid working on an all-white screen state for a long time