

23.8" P-cap Touch Monitor






Model	H2414PW-UH
Touch Technology	P-cap
Version	V 1.0

Horsent® applies aluminum frame and metal-back cover to the design of wall mounted series, and featured with beautiful and elegant looks, popular for various commercial or interactive signage purposes, like retail store, information desk... The multi-touch PCAP touch screen and the aluminum frame are assembled tightly, and the tiny gap is filled with silica gel to achieve seamless front surface, while stand harsh environment with high level of dust proof and waterproof.



Except being mounted on wall, flexibly they can be installed at any places like table-top or hall with the optional stands.

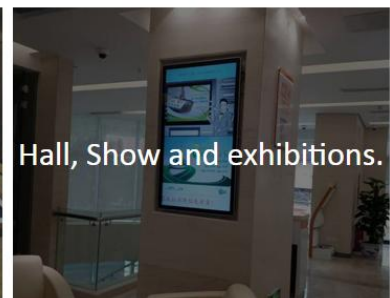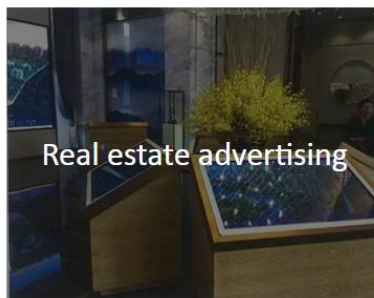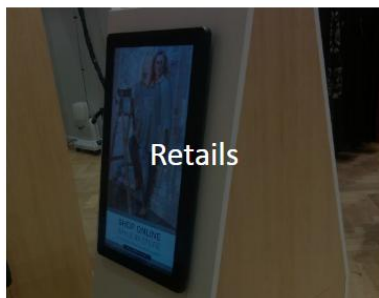




Product specification


Product Name		23.8 inch LCD Touch Monitor
Product Model		H2414PW-UH
LCD panel Technical Parameter	Size	23.8 inch
	Aspect Ratio	16 : 9
	Backlight Type	LED Backlight
	Pixel Pitch	0.2745mm x 0.2745mm
	Active Area	527.04mm x 296.46mm
	Best Resolution	1920 × 1080 @ 60 Hz
	Response Time	14 ms
	Color	16.7 million
	Brightness	LCD Panel: 250 cd/m ²
	Contrast Ratio	1000:1 (standard Values)
	Viewing Angle (CR > 10)	Horizontal: 178° (89°/89°) Vertical: 178° (89°/89°)
	Video Input Format	RGB Analog Signal/ Digital Signal
	Video Input Interface	VGA / DVI
	Input Frequency	Horizontal: 30~82 Hz Vertical: 50~75 Hz
	Power Consumption	≤20W
	Warranty	1 Year
Touch Screen Technical Parameter	Touch Screen Type	Capacitive Touch Screen
	Cover Glass	2.4mm
	Transparency	87%
	Hardness	7H
	Interface	USB2.0
	Touch Point	10
	Response Time	≤10 ms
	Touch Method	Finger / Capacitive Pen
	Touch Lifespan	≥50,000,000
	Linearity	< 2%
	Single-point OS	Windows XP , Linux
	Multi-point OS	Windows7/8/10 , Android
	Warranty	1 Year
Touch Monitor Technical Parameter	Boundary Dimension	584.80mm × 354.3mm × 37.8mm
	OSD Panel	Optional Accessory : Power switch、Menu、Up、Auto、Down
	Power Supply	Input : DC 12V±5%
	Power Consumption	Max : 27w; Sleep : 2w; Off : 1w
	Installation	VESA 100mm*100mm
	Accessory (Optional)	Signal Line VGA, D-SUB 15pin, 1.5m, male to male
		USB Wire A male to B male , 1.8m
		Adaptor WT1203000 , 12V/3.0A , 115mmx47mmx31mm , Length 1.0m , ϕ 2.5 , Black
		Power Line Power Line, 1.5m , Black
	Temperature	Operating: 0°C-40°C ; Storage: -20°C-60°C
	Humidity	Operating: 20%-80%; Storage: 10%-90%
	Operation Altitude	< 3000m
	Warranty	1 Year



Product drawing




Top View

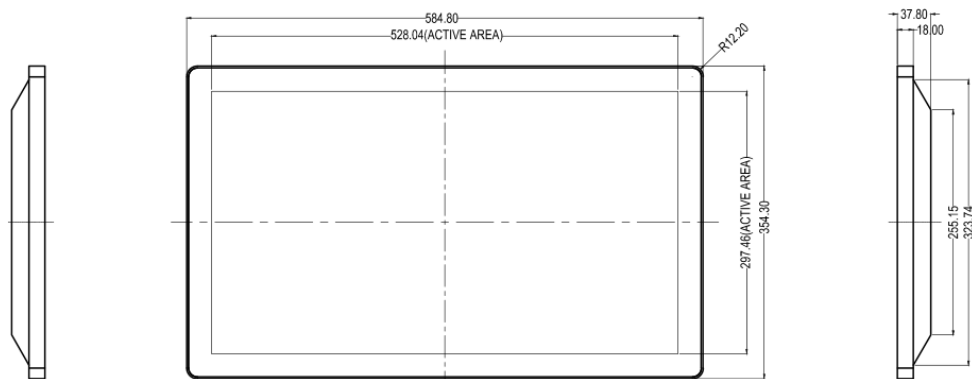

Side View


Front View

Side View

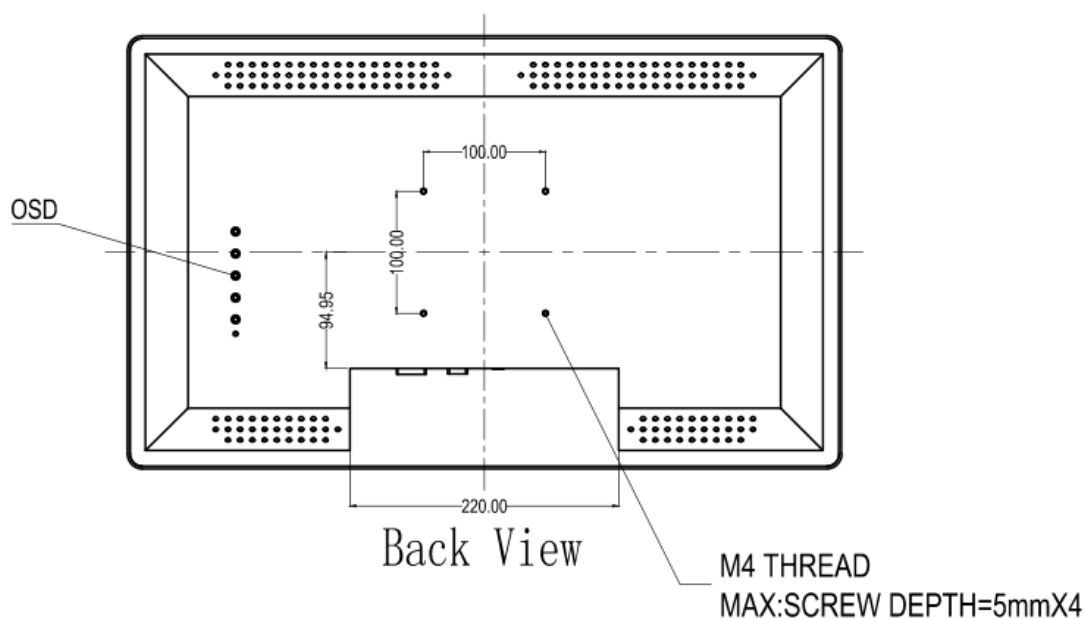

Back View

M4 THREAD
MAX:SCREW DEPTH=5mmX4

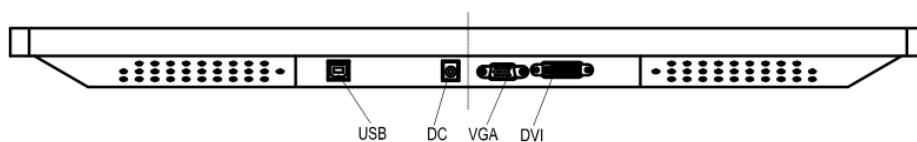

Bottom View

