




# AV over Ethernet Adaptor



## System Structure

Each user can work independently

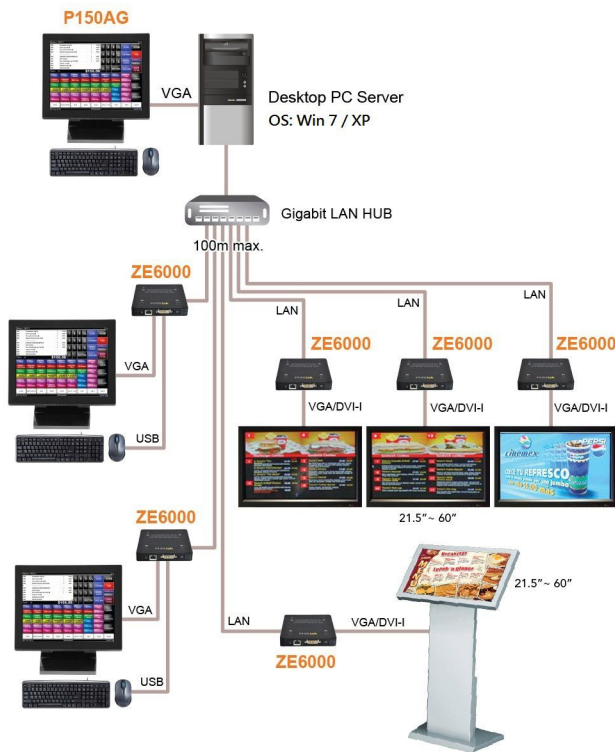

## Application


Digital Signage / Media Price Checker  
Training Center / Kiosk

## Specification

| ZE6000                  |                           |                                                                      |
|-------------------------|---------------------------|----------------------------------------------------------------------|
| Power Brick             | AC adaptor input          | AC100V~240V, 50~60Hz                                                 |
|                         | DC power output           | 12Vdc @1.5A                                                          |
| Power Consumption       |                           | 3 watts + 10 watts full USB bus power                                |
|                         | LED indicators            | Power LED<br>Network Connect LED<br>Identification LED               |
| Input/output connectors | Ethernet input            | x 1 RJ-45, 10/100/1000Mb Ethernet                                    |
|                         | USB downstream ports      | x 4 USB A type (USB 2.0)                                             |
|                         | Video output              | x 1 DVI-I connector for VGA or DVI                                   |
|                         | Audio output 1            | x 1 Line out phone jack                                              |
|                         | Audio output 2            | x 1 headphone                                                        |
| Max. Video resolution   | FHD                       | 2048 x 1152                                                          |
|                         |                           |                                                                      |
| Environmental           | Operating temperature     | 0° C ~ 35° C                                                         |
|                         | Non-operating temperature | -30° C ~ 60° C                                                       |
|                         | Operating Humidity        | 10% ~ 90% (non-condensing)                                           |
|                         | Non-operating Humidity    | 5% ~ 95%                                                             |
| Mechanical              | Cooling                   | Fanless                                                              |
|                         | Mounting                  | 8 VESA holes; 4 spaced at 100mm centers and 4 spaced at 75mm centers |
|                         | Dimensions W x D x H      | 115mm x 115mm x 17.8mm                                               |
|                         | Weight                    | 326g                                                                 |
| Server OS supporting    |                           | XP,Vista, Win7, Win Server 2008R2, Linux                             |
| Regulatory              |                           | FCC, CE, VCCI                                                        |
| Compliance              |                           | WEEE, RoHS                                                           |
| Optional                |                           | DVI to HDMI cable (1.8 meters)                                       |


\* Specification is subject to be changed without prior notice.

## I/O indicator (unit: mm)



1. Microphone
2. Headphone
3. LED indicators  
Power LED  
Network connect LED  
Identification LED
4. USB A type down stream port x 4
5. Line out
6. RJ-45 Ethernet connector
7. DVI-I Connector
8. DC 12V in  
Reset

## Cable installation

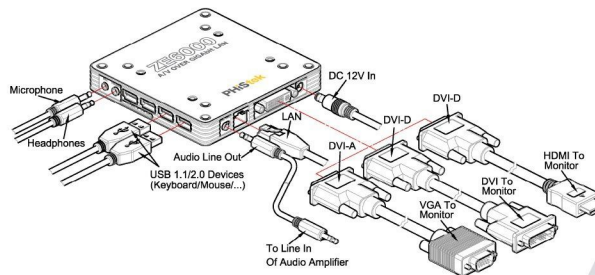

## VESA Mounting

( Patent: M433940 )

