

XPE



Network

Signal Tower

Signal Light

Revolving Warming Light

Cube Tower

Audibles

Hybrid Signaling Devices

LED Illumination

Options

Colors Red, Amber, Green, Blue

Globe Polycarbonate resin with superb shock resistance and heat resistance


The XPE Series features a 162mm diameter, a triple-flash rate pattern, and multiple voltage options.

- Triple-flash pattern with 110 flash rate per minute
- Durable structure with stainless steel bolts
- Built-in dimmer function
- Available colors: Red, Amber, Green, Blue

Specifications

Model	Rated Voltage	Power Consumption	Flashing Rate	Mass
XPE-12	12V DC	5.0W	110±10 /minute (Triple flash)	1.2kg
XPE-24	24V DC	4.5W		
XPE-M2	100/200/230V AC	5.7W		

Model Code

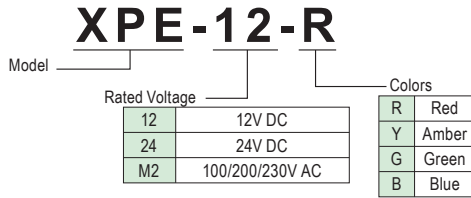


Optional Parts


For details, see pages 182 to 187.

Optional Parts	Model
Wallmount Bracket	SZ-023
Wallmount Bracket	SZ-008

Dimensions (mm)

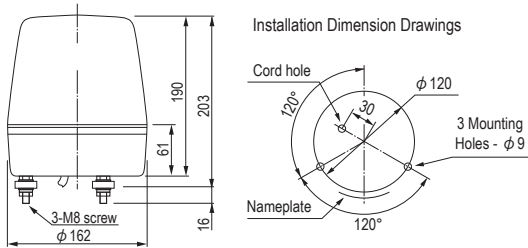

Wiring Diagram

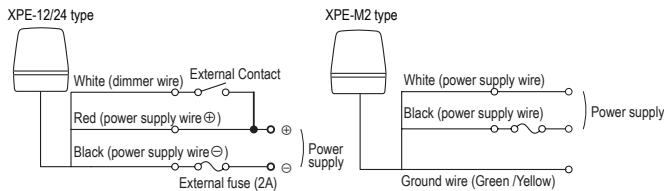

XME



Colors Red, Amber, Blue

Globe Polycarbonate resin with superb shock resistance and heat resistance


The XME Series features a 182mm diameter, a triple-flash rate pattern, and multiple voltage options.

- Triple-flash pattern with 110 flash rate per minute
- Durable structure with stainless steel lens mounts and bolts
- Built-in dimmer function
- Available colors: Red, Amber, Blue

Specifications

Model	Rated Voltage	Power Consumption	Flashing Rate	Mass
XME-12	12V DC	5.0W	110±10 /minute (Triple flash)	1.8kg
XME-24	24V DC	4.5W		
XME-M2	100/200/230V AC	5.7W		

Model Code

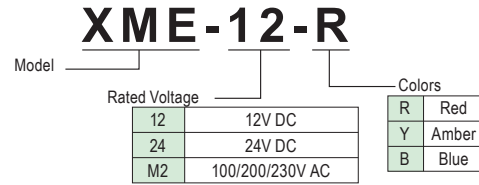


Optional Parts

For details, see pages 182 to 187.

Optional Parts	Model
Wallmount Bracket	SZ-008

Dimensions (mm)

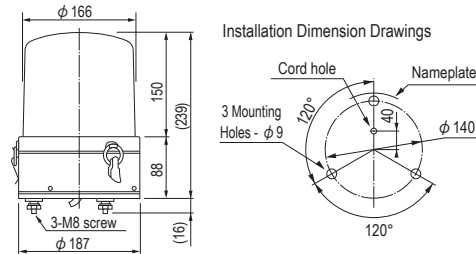

Wiring Diagram

