

## Professional Series



Green Power



Environmental Friendly



Energy Saving



## PowerTank F Series Line Interactive UPS



- User Friendly LCD Display
- Built-in AVR for Voltage Stabilization
- High Quality SLA Battery
- Built-in EMI/RFI Noise Filter
- Lightning, Spike & Surge Protection
- Modem / Fax / Tel Line / Network Protection (RJ45) \*Optional
- Comes with USB Port & Power Management Software \*Optional



• Built-in •  
AVR



• British •  
Socket



• 3 Years •  
Warranty

# Professional Series



Green Power




Environmental Friendly



Energy Saving

# RIGHT POWER

The Power Of Continuity

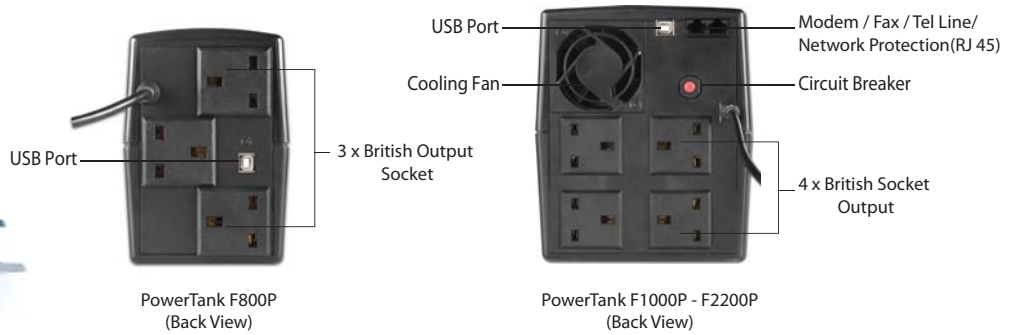

### Technical Specification:

MODEL	PowerTank F800	PowerTank F800P	PowerTank F1000E	PowerTank F1000P	PowerTank F1200P	PowerTank F1500P	PowerTank F2200P
CAPACITY (VA)	800VA	800VA	1000VA	1000VA	1200VA	1500VA	2200VA
<b>INPUT</b>							
INPUT VOLTAGE	220V / 230V / 240V						
VOLTAGE RANGE	162 - 290VAC						
FREQUENCY RANGE	50Hz or 60Hz						
<b>OUTPUT</b>							
OUTPUT VOLTAGE	220V / 230V / 240V						
AC VOLTAGE REGULATION (Batt. Mode)	± 10%						
OUTPUT FREQUENCY	50Hz or 60Hz +/-1%						
WAVEFORM	Simulated Sinewave						
TRANSFER TIME (Typical)	4ms						
OUTPUT SOCKET	3 x British Socket			4 x British Socket			
<b>BATTERY</b>							
SEALED LEAD ACID MAINTENANCE FREE	12V7AH x 1	12V 7AH x 1	12V 9AH x 1	12V 7AH x 2	12V 7AH x 2	12V 7.5AH x 2	12V 9AH x 2
BACKUP TIME (Depending on load)	20 to 30 minutes						
<b>STATUS INDICATOR</b>							
LCD DISPLAY	Input Voltage , Output Voltage, Battery Capacity, Load Level, UPS Status						
AUDIBLE ALARMS	On Battery, Low Battery, Overload, UPS Fault						
<b>COMMUNICATION</b>							
POWER MANAGEMENT SOFTWARE	N/A	Support Windows Family, Linux & MAC	N/A	Support Windows Family, Linux & MAC			
INTERFACE		USB Port		USB Port			
<b>SURGE PROTECTION &amp; FILTERING</b>							
EMI/RFI NOISE FILTER	Yes						
LIGHTNING/SURGE PROTECTION	Yes						
OVERLOAD PROTECTION	Breaker / Fuse						
PHONE/FAX/MODEM/NETWORK PROTECTION	N/A			RJ 45 (1 in 1 out)			
<b>PHYSICAL</b>							
OPERATING ENVIRONMENT	0-40°C, 0-90% Relative Humidity (Non-Condensing)						
NOISE LEVEL	Less Than 40dB			Less Than 45dB			
DIMENSION (D x W x H)mm	286 x 96 x 138			298 x 148 x 178			
WEIGHT (KG)	4.8	4.8	6.5	8	8.7	9.1	10.8
<b>WARRANTY</b>							
UPS WARRANTY	3 Years Full Warranty Include Parts & Labour						
	2 Years Warranty for Battery						

\*Specification subjects to change without prior notice

