PHiStek
Connecting Zero Client World

ZE5000


AV over Ethernet Adaptor

*** Ethernet & USB 2.0 Dual Modes**



Zero Client System Structure

Each user can work independently

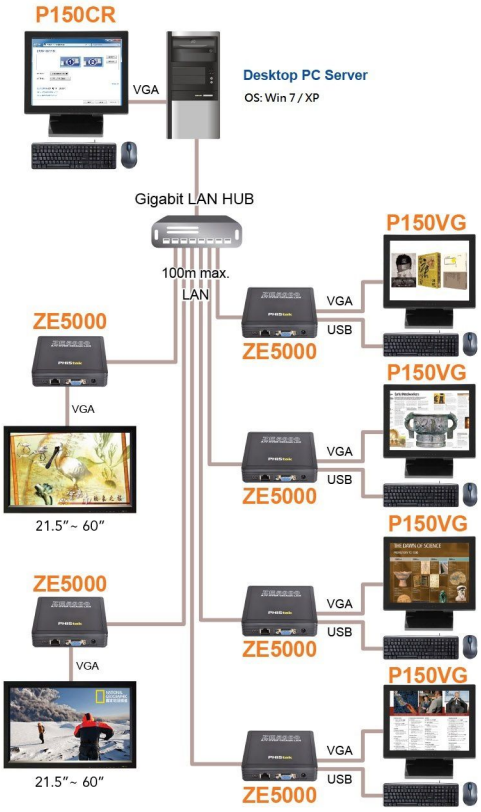

Application


Digital Signage / Education / Trainning Center / Kiosk

Specification

ZE5000		
Power	Power supply	AC100V~240V, 50~60Hz, 5Vdc @2A
	Power Consumption	3.0W max
	LED indicators	Yellow: to indicate power on
		Blue: to indicate device connected to Host PC
		Green: to indicate device identified
Input/output connectors	Ethernet input	x1 RJ-45, 10/100/1000Mb Ethernet
	USB upstream input (for USB network application)	x1 USB in (Mini USB Type B) to connect to host PC (When USB upstream input is used, Ethernet input data communication is disabled)
	USB downstream ports	x4 USB A type (USB 2.0) Keyboard, Mouse, USB flash drive, other USB devices
	Video ouput	x1 VGA, 15pin D-sub
	Audio output 1	x1 Phone jack
	Audio input	x1 Microphone
Max. Video resolution	FHD	2048 x 1152
Environmental	Operating temperature	0ºC ~ 35ºC
	Non-operating temperature	-30ºC ~ 60ºC
	Operating Humidity	10% ~ 90% (non-condensing)
	Non-operating Humidity	5 % ~ 95%
	Cooling	Fanless
Mechanical	Mounting	External VESA mount Hook bracket (optional)
	Dimensions (W x D x H)	115mm x 115mm x 28.5mm
	Weight	160g (net)
Regulatory		FCC, CE, VCCI
Compliance		WEEE, RoHS


* Specification is subject to be changed without prior notice.

I/O indicator (unit: mm)




1. Microphone
2. Headphone
3. LED indicators
   Power LED
   Network connect LED
   Identification LED
4. Reset
5. USB A type downstream port x 4
6. Mini USB upstream port (USB mode)
7. RJ-45 Ethernet connetor
8. VGA connetor
9. DC 5V in

Cable installation

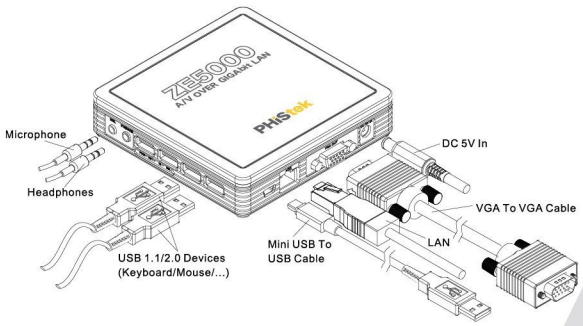

VESA Mounting

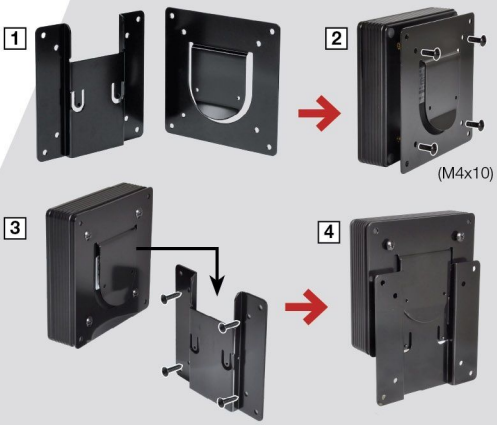

www.phistek.com

2015. 07